




1Watts, 2.1-2.8GHz Power Amplifier

RPA11A

Description

The **RPA11** is a 2.1 to 2.8 GHz high efficiency, high power GaAs Enhancement Mode pHEMT MMIC power amplifier. This MMIC power amplifier doesn't require any off chip components.

The device is designed for 802.11b/g and WLAN MIMO system. The Power Amplifier exhibits unparalleled linearity and efficiency for both 802.11g and 802.11b WLAN systems.

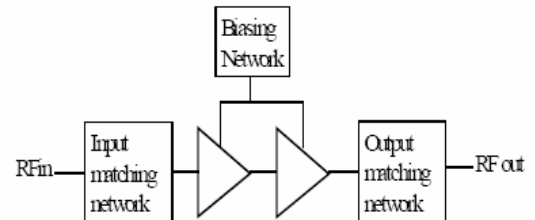

Applications

- IEEE 802.11 b/g WLAN
- Cellular System
- WiFi Systems
- ISM Band Systems

Key Features

- Linear power output from 22 to 28dBm.
- Works with multiple power supplied of 3.3V, 5V and 8V.
- Adjustable power output through power stage bias control.
- Good power added efficiency.
- On chip ESD protection
- Highly stable over all bias, input power and load conditions.
- Very small variation in Gain/Return losses/NF (0.5dB/1dB/0.3dB) over all process corners, temperature variations (-25°C to 100°C) and supply voltage variations ($\pm 10\%$) .



1Watts, 2.1-2.8GHz Power Amplifier

RPA11A

Electrical Specification


Parameter	Typical values	Units	Comments
Frequency Range	2.1 to 2.8	GHz	
Gain	28.5	dB	
Gain Flatness	1.5	dB	
Input Return Loss	12	dB	
Output Return Loss	8	dB	
Noise Figure	2.4	dB	
P1 dB Pout	31.6	dBm	@ 2.45 GHz
PAE(%)	35	%	
OIP3	40	dBm	~ 41 @2.5GHz
EVM	<1.8	%	@27 dBm Pout
Supply voltage	8	V	~29dBm P1dB @2.4G with 5Volts
Supply Current	550	mA	
ESD	2KV, HBM		



1Watts, 2.1-2.8GHz Power Amplifier

RPA11A

Simulated Results

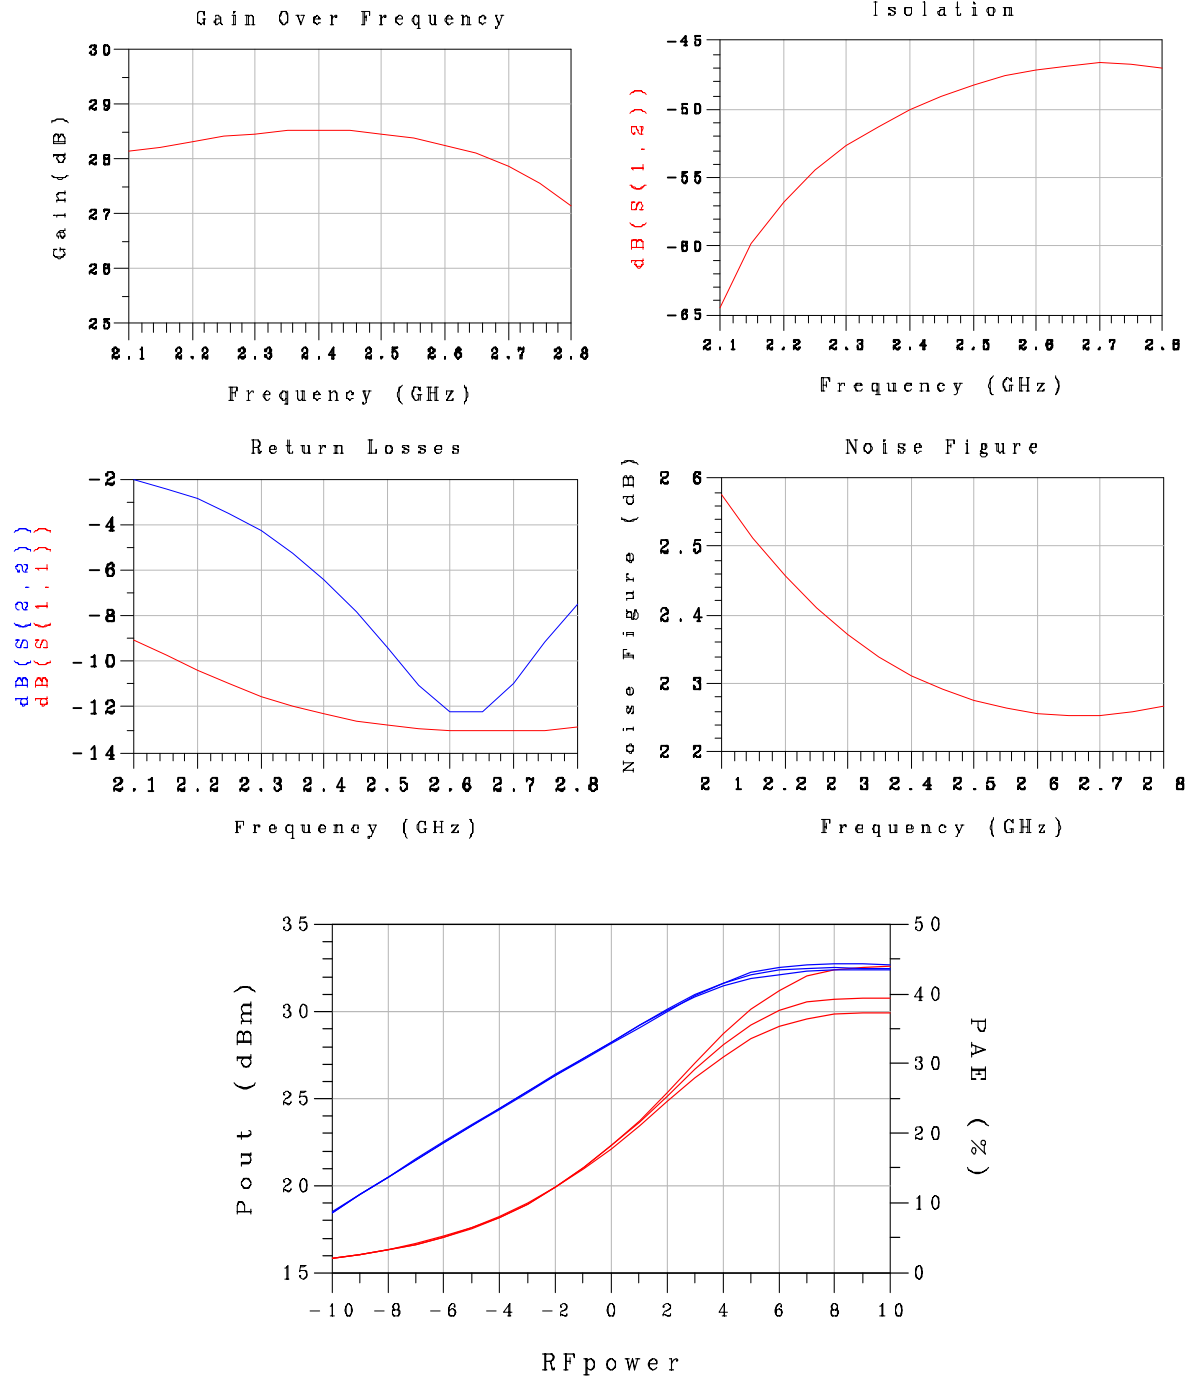





1Watts, 2.1-2.8GHz Power Amplifier

RPA11A


P1dB power output over frequency

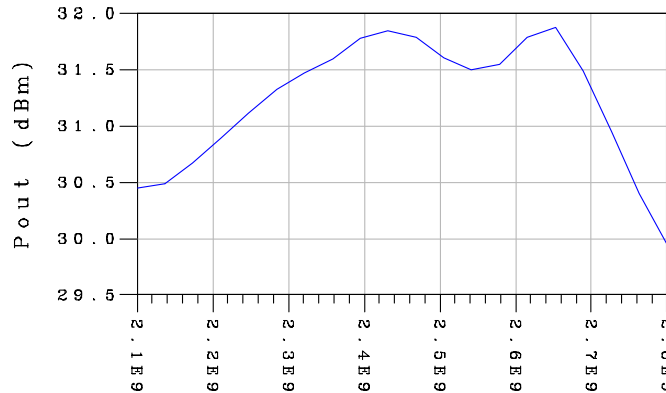

OIP3 Over Frequency

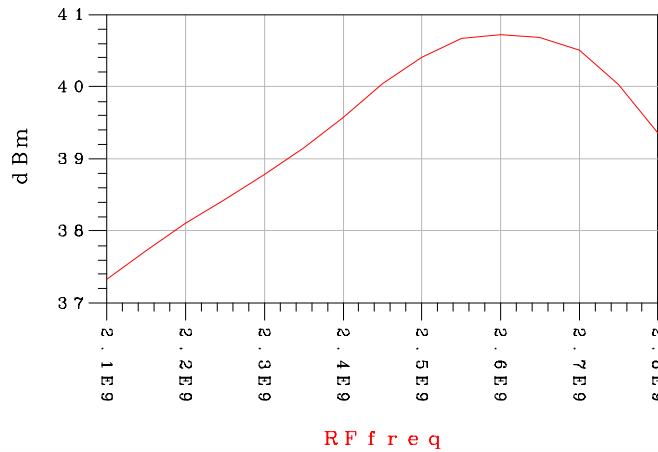

Error Vector Magnitude (%)

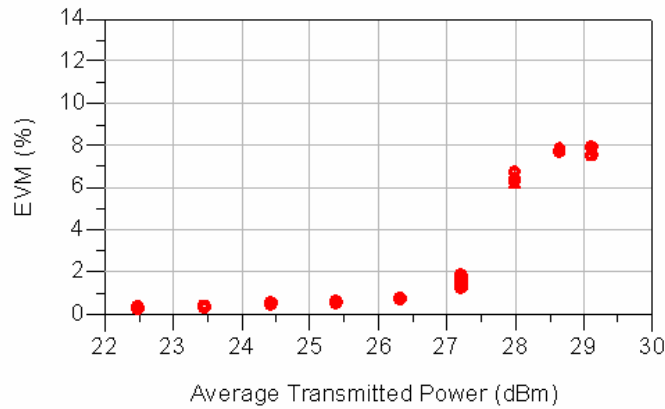



1Watts, 2.1-2.8GHz Power Amplifier

RPA11A

Layout

